



# FM2200

- [illegible]

In case of losing connection FM2200 can store up to 15000 records, and once the connection is established the device will send stored data via GPRS. So you won't lose your data (coordinates, sensors data and etc.).

## TECHNICAL DETAILS

### GSM

- Dual-Band 900/1800 MHz
- GPRS class 10 (up to 85,6 kbps)
- SMS (text/data)

### GPS


- NMEA, GGA, GGL, GSA, GSV, RMC, WGS-84 protocol compatible
- 50 channel GPS receiver
- -160dBm sensitivity

### Interface

- Inputs:
  - ✧ 2 digital inputs(for door opening monitoring, panic button or other digital sensors)
  - ✧ 2 pins for power supply can measure vehicle battery voltage (analog) and (in most cases) engine start (generated higher voltage on vehicle's battery)
  - ✧ Virtual (Data) inputs:
    - + Driven distance (GPS odometer)
    - + Vehicle speed monitoring
- 2 Digital Outputs
- Power supply +10V...+30V
- 3 Status LEDs
- USB Port
- Configuration and firmware upload
- Internal GSM antenna
- External GPS antenna

### FEATURES

- GPS and I/O data acquisition
- Real Time tracking
- Smart algorithm of data acquisition (time, distance and event based)
- Sending acquired data via GPRS (TCP/IP and UDP/IP protocols)
- Smart algorithm of GPRS connections (GPRS traffic saving)
- Operating in roaming networks (preferred GSM providers list)
- Events on I/O detection and sending via GPRS or SMS.
- Scheduled 24 coordinates SMS sending
- 5 geofence zones (rectangular or circle)
- Sleep mode (saving vehicle's accumulators)
- OTA (firmware updating via GPRS)
- Motion sensor
- Small and easy to mount case

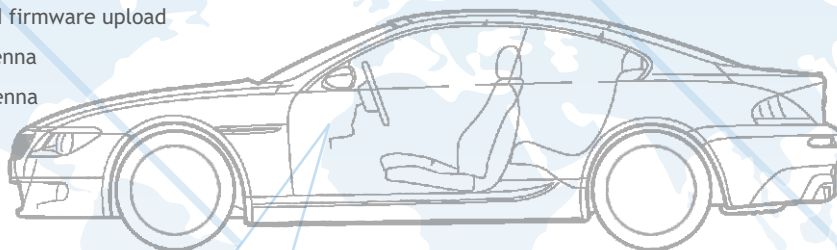

### Applications

- Security
- Track and trace
- Road assistance
- Toll collect
- Insurance

#### HQ JSC Teltonika

Saltoniskiu st. 10c  
LT-08105, Vilnius  
Lithuania

Tel +370 5 212 74 72 (Lithuania)  
Tel +370 5 265 73 60 (International Calls Landline)  
Tel +370 5 265 73 61 (Landline)  
Fax +370 5 276 13 80  
Email [info@teltonika.lt](mailto:info@teltonika.lt)  
Web [www.teltonika.lt](http://www.teltonika.lt)